



HEAVY DUTY DOUBLE BAR RACK W/ V-BRACE & CASTERS

Item # K41WDAG

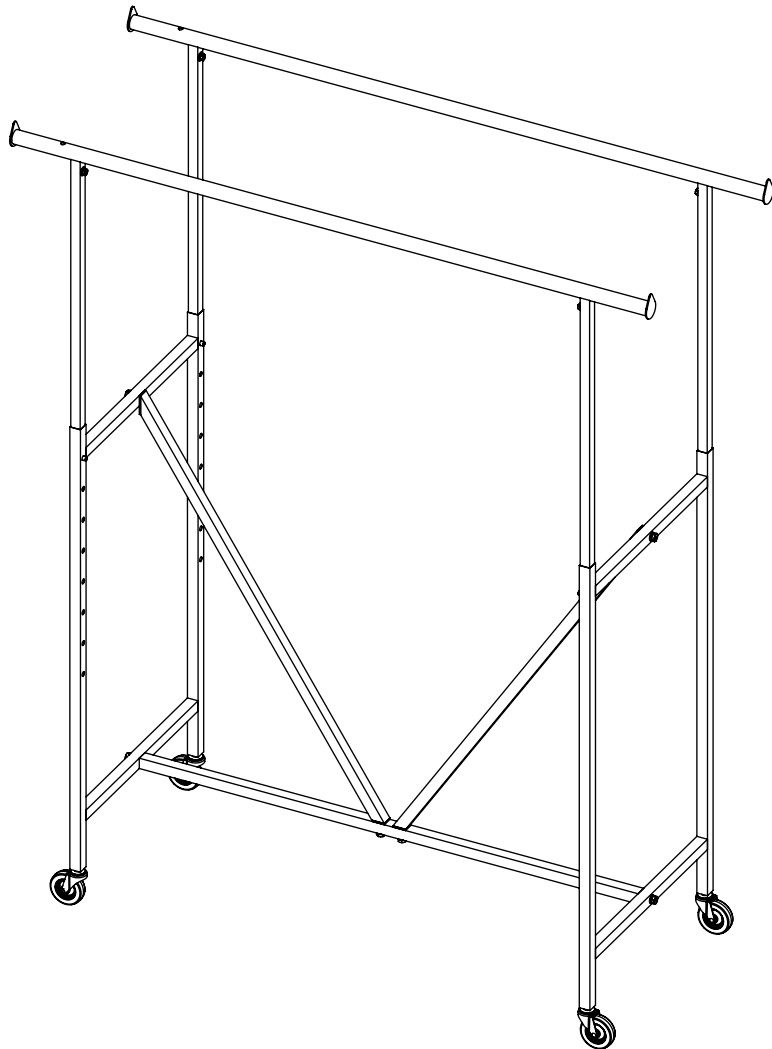


**2 PEOPLE
REQUIRED
FOR
ASSEMBLY**

INCLUDED HARDWARE


4X

3/8"-16 x 1.375" LONG
HEX CAP SCREW



2X

3/8"-16 x 1.875" LONG
HEX CAP SCREW



10X

3/8" LOCK WASHER



10X

3/8" FLAT WASHER



4X

5/16"-18 x 1/2" LONG
HEX CAP SCREW



4X

5/16" LOCK WASHER




4X

5/16" FLAT WASHER




TOOLS PROVIDED



2X


ALLEN KEY

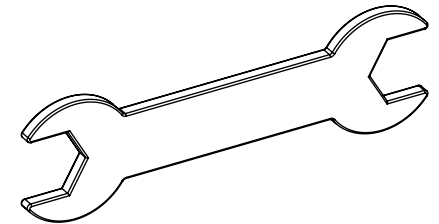

WRENCH


1

ENSURE THAT ALL (4) CASTERS ARE PROPERLY THREADED INTO THE BOTTOM USING (1) 3/8" LOCK WASHER AND (1) 3/8" FLAT WASHER PER CASTER.

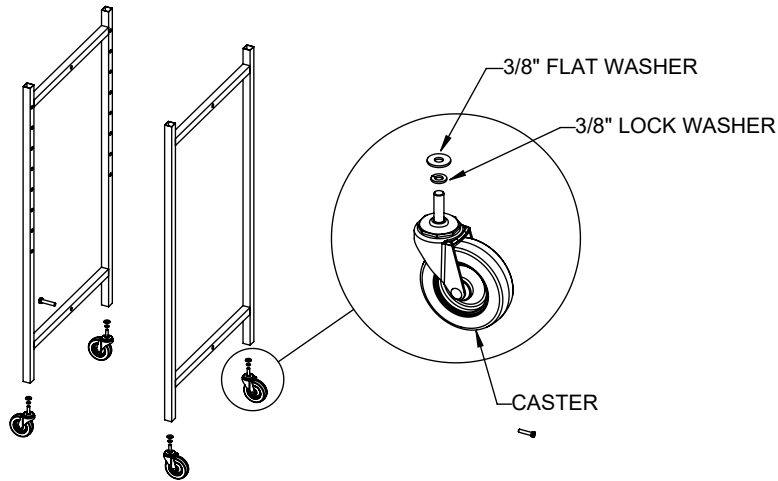


2

CONNECT THE SIDE FRAMES USING THE LOWER CROSSBAR, (2) 3/8-16 X 1.875" L HEX CAP SCREWS, (2) 3/8" LOCK WASHERS, AND (2) 3/8" FLAT WASHERS.

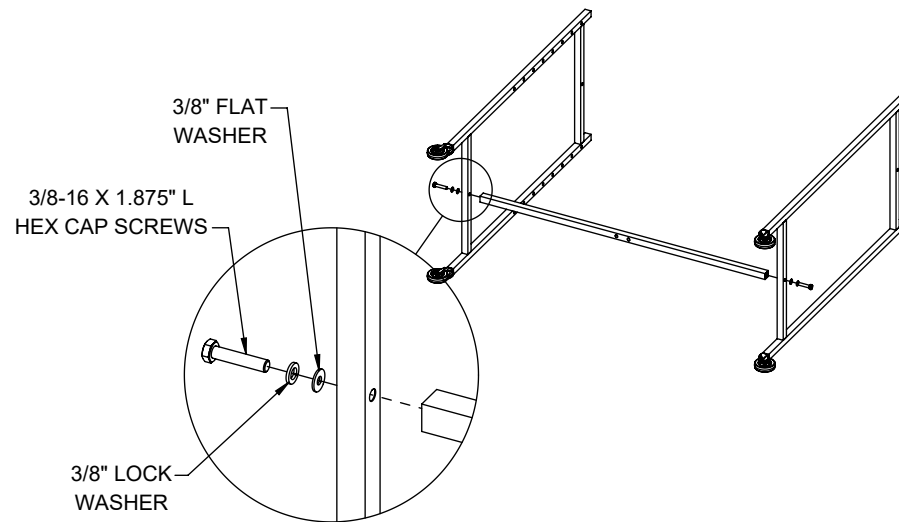


3

MOUNT THE DIAGONAL BRACE ON ONE SIDE USING (2) 3/8-16 X 35MM L HEX CAP SCREWS, (2) 3/8" LOCK WASHERS, AND (2) 3/8" FLAT WASHERS.

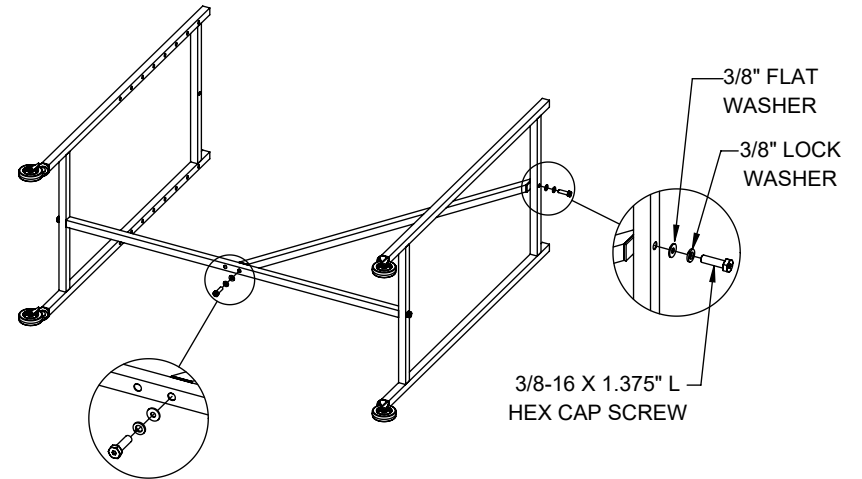

4


REPEAT STEP 3 FOR THE OTHER DIAGONAL BRACE.

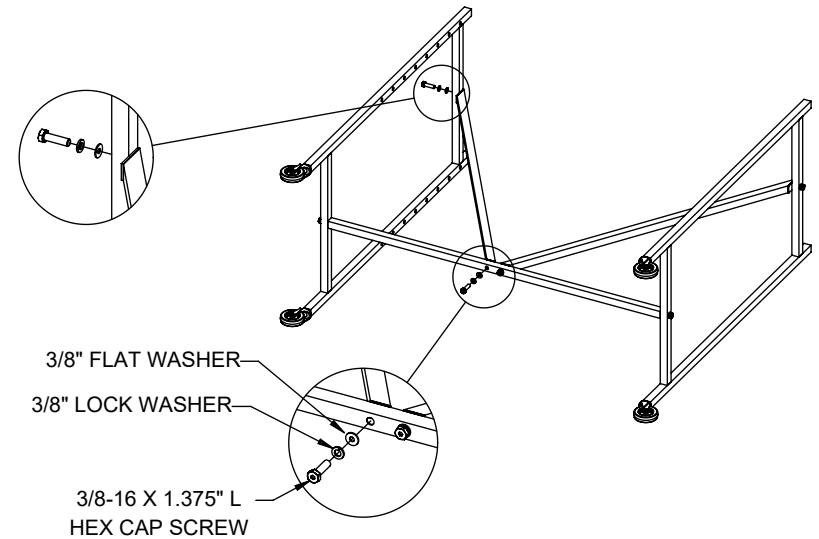

5

MOUNT THE HANGBAR TO (2) UPRIGHTS USING (2) 5/16-18 X 1/2" L HEX HEAD CAP SCREWS, (2) 5/16" LOCK WASHERS, AND (2) 5/16" FLAT WASHERS.

REPEAT THIS STEP FOR BOTH HANGBARS

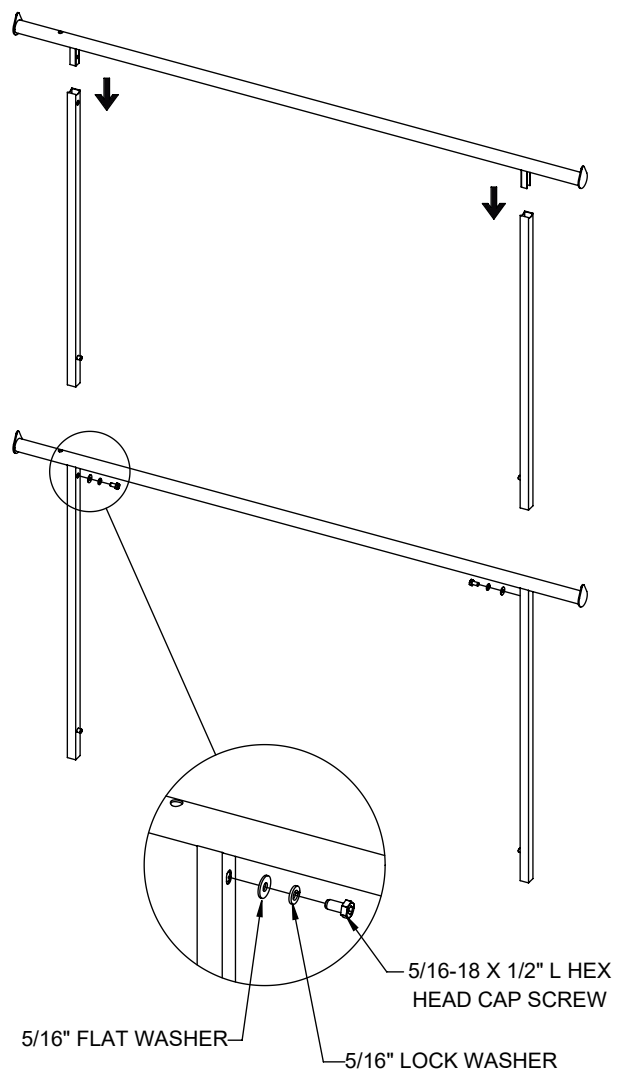

6

DEPRESS PUSH BUTTONS AND INSTALL HANGBARS ONTO UNIT.

ASSEMBLY IS NOW COMPLETE

