



DOUBLE BALLET BAR WITH J FACEOUTS


Item #PSBB2TSCBR2

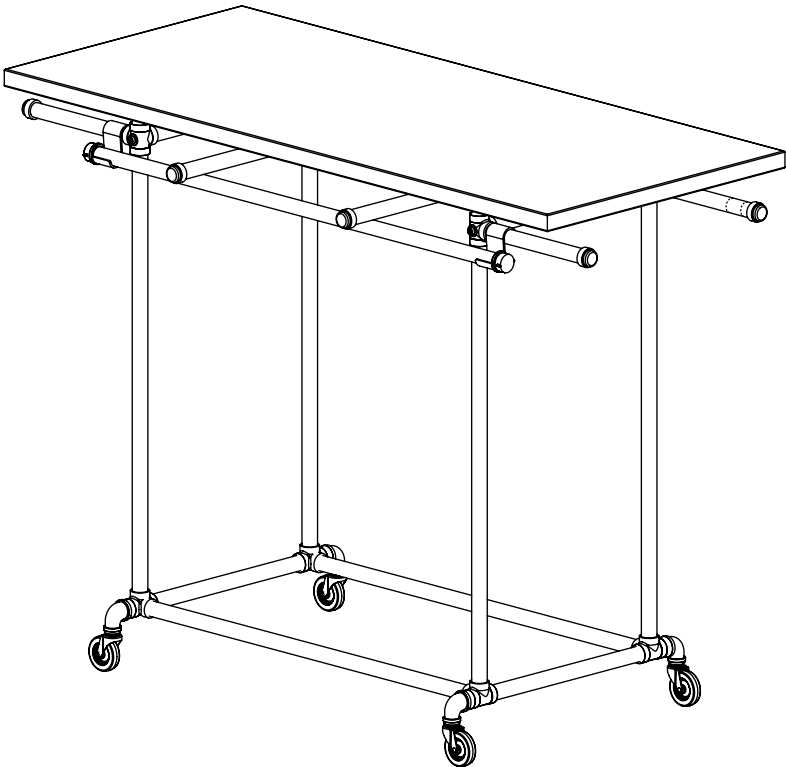

INCLUDED HARDWARE




4X
SOCKET HEAD CAP SCREW



16X
WOOD SCREW



8X
LOCK WASHER




8X
FLAT WASHER

TOOLS INCLUDED




ALLEN KEY




WRENCH


TOOLS NOT INCLUDED



POWER DRILL



SCREW DRIVER
(OPTIONAL)



TAPE MEASURE




1

INSTALL CASTERS ONTO PIPE BASE AS SHOWN. USE INCLUDED WRENCH TO TIGHTEN CASTERS.

NOTE: INSTALL LOCKING CASTERS IN OPPOSITE CORNERS.

THREAD UPRIGHTS INTO PIPE BASE AS TIGHT AS POSSIBLE WITH ANY OF THE CLEARANCE HOLES ALIGNED AS SHOWN.

NOTE: A SCREWDRIVER, OR SIMILAR TOOL, CAN BE INSERTED INTO THE CLEARANCE HOLES FOR LEVERAGE TO HELP TIGHTEN THE UPRIGHT.

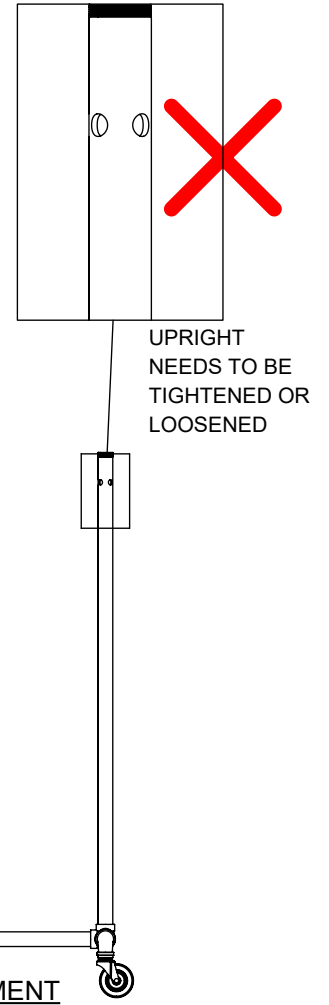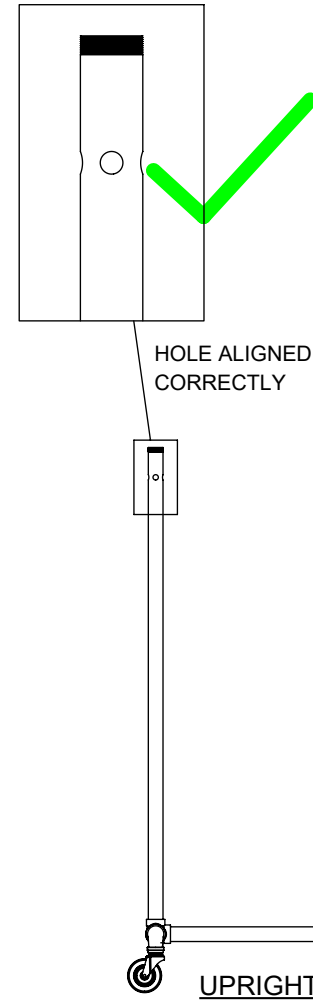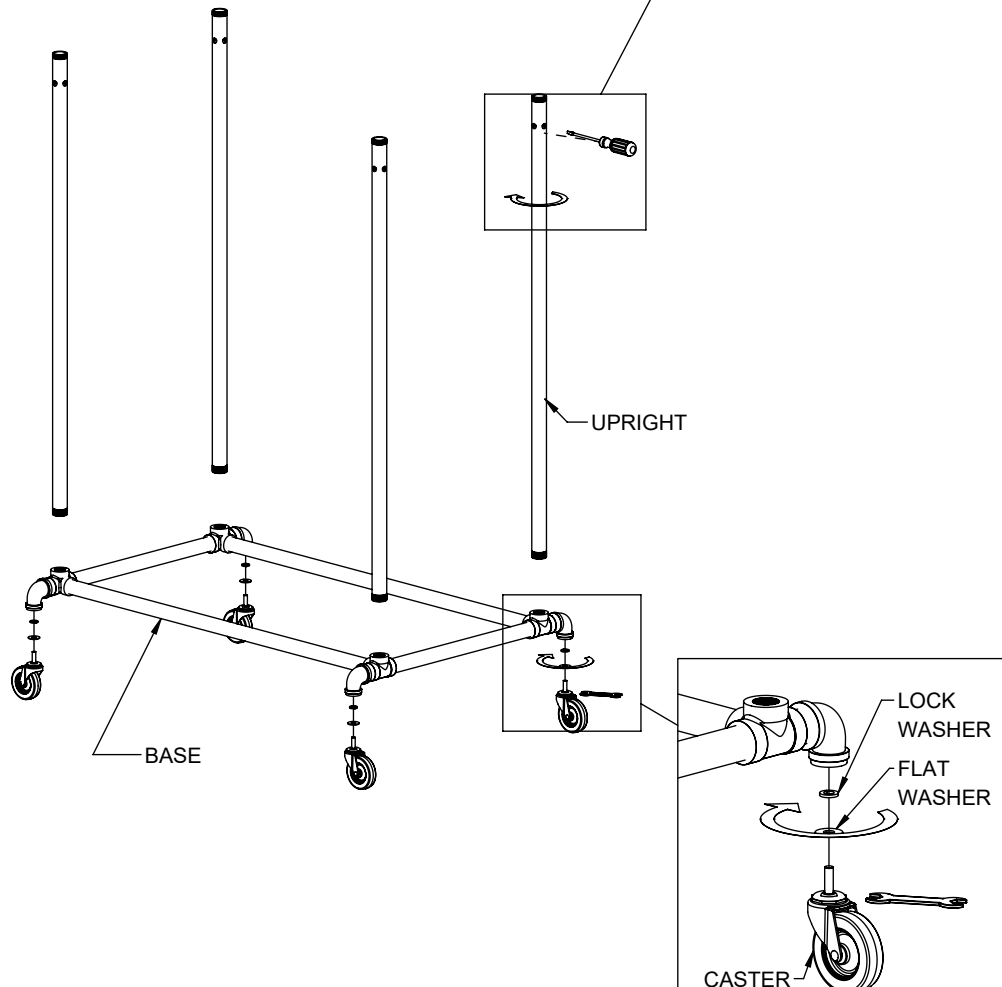


2

WARNING: THIS STEP MAY REQUIRE 2 PERSONS.

SLIDE THE UPPER FRAME ONTO THE (4) UPRIGHT. INSTALL A CAP SCREW, LOCK WASHER, AND FLAT WASHER AS SHOWN SO THE SCREW PASSES THROUGH THE CLEARANCE HOLE IN THE UPRIGHT AND THREADS INTO THE UPPER FRAME. TIGHTEN CAP SCREW WITH INCLUDED ALLEN KEY.

NOTES:

- IF THE CLEARANCE HOLES DO NOT ALIGN WITH THE HOLES IN THE UPPER FRAME REFER TO STEP 1 TO FIX ALIGNMENT.
- INSTALL SCREWS IN OPPOSITE CORNERS UNTIL ALL 4 UPRIGHTS HAVE A SCREW INSTALLED.


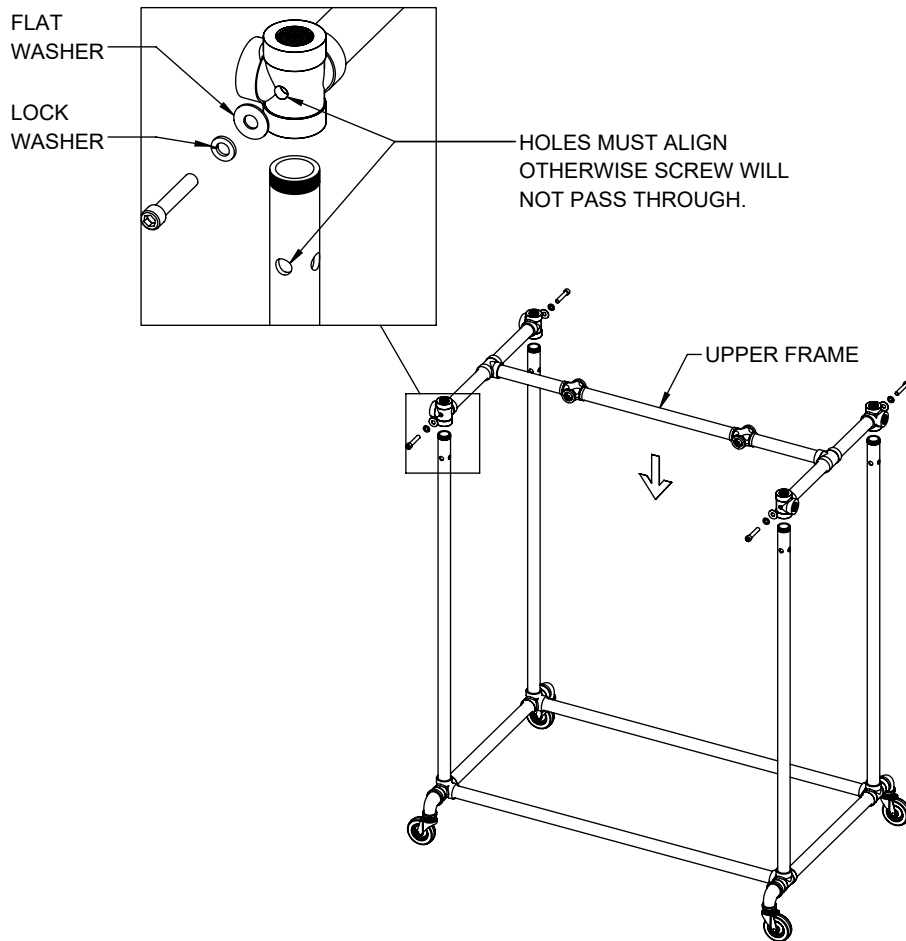


3

THREAD THE PIPE FLANGES ONTO UPRIGHTS UNTIL TIGHT. THE TABLE TOP CAN NOW BE POSITIONED ON THE FLANGES AS SHOWN AND SECURED WITH WOOD SCREWS.

NOTES:

- A POWER DRILL ON A LOW TORQUE SETTING SHOULD BE USED.
- USE TAPE MEASURE TO CHECK THAT THE TOP IS CENTERED.

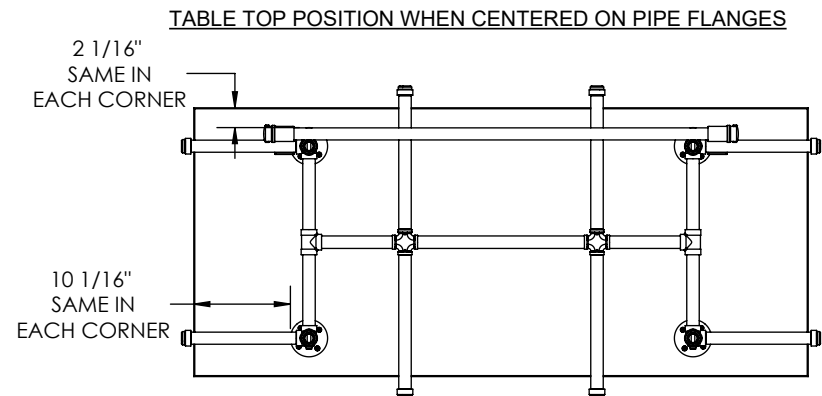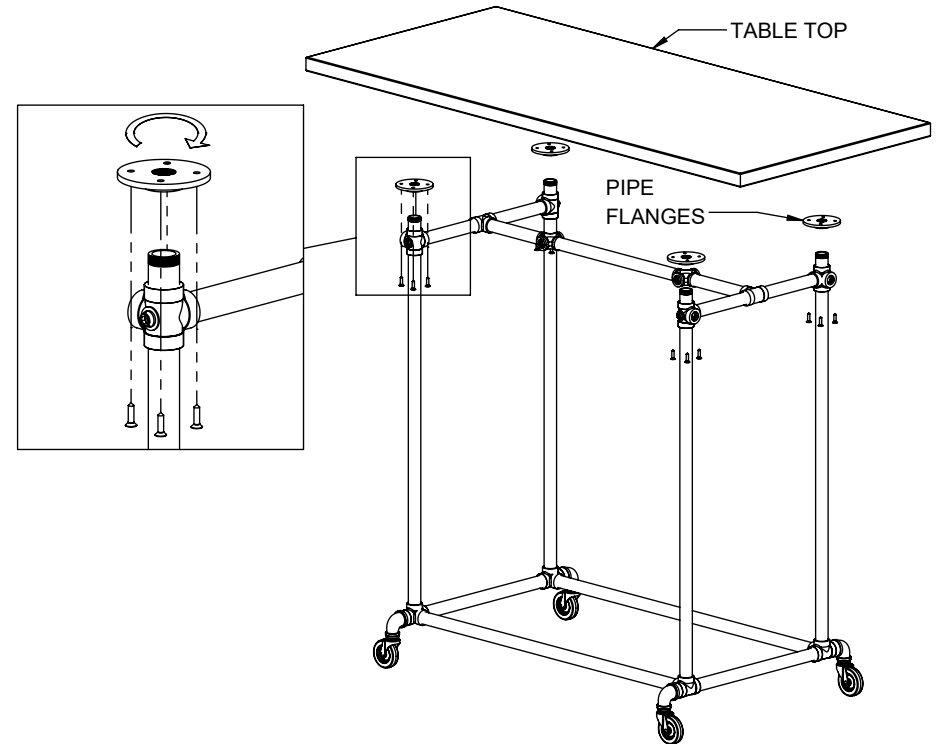


4


OBSERVE THE TWO DIFFERENT FACE OUT SIZES.
THREAD THE SHORT FACE OUTS ON THE ENDS OF THE FIXTURE AND THE LONG FACE
OUTS IN THE CENTER.



SHORT FACE OUT



LONG FACE OUT

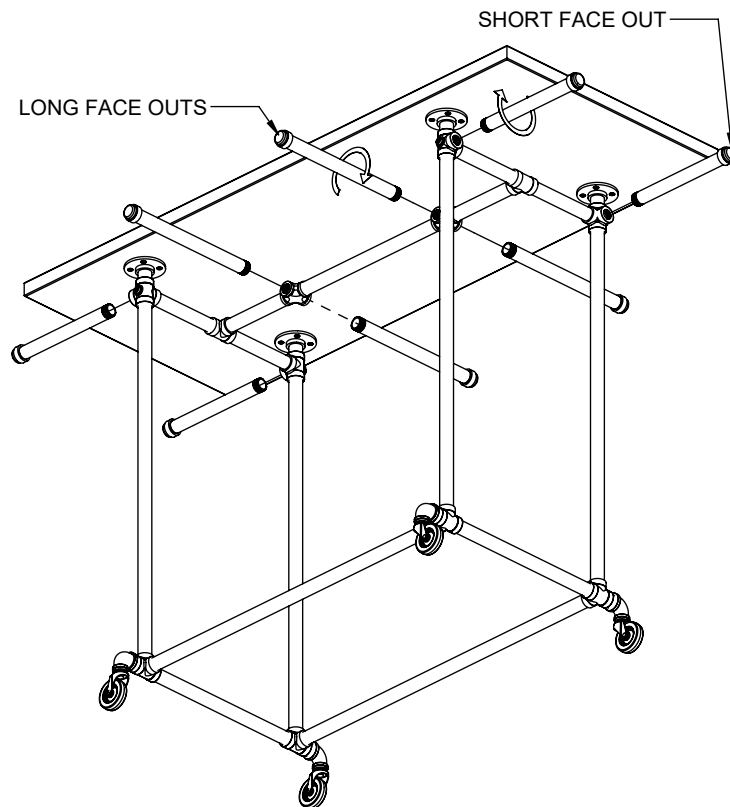

INSTALLING LONG HANGBAR

- ① REMOVE FACE OUTS FROM SIDE YOU WANT TO PLACE LONG HANGBAR ON.
- ② HANG THE LONG HANG BAR BY THE J HOOKS ONTO THE OUTER FACE OUTS.
- ③ REINSTALL FACE OUTS FROM PREVIOUS STEP.

